

Scour Protection – Stormwater Pipe Outfalls & Check Dams



What is this?

At stormwater pipe outfalls or along open drainage channels use rocks, vegetation, or other materials to break up concentrated flows, reduce the velocity of flows to non-erosive rates and to stabilise the outflow point.

Why is it important?

Sediment generated from erosion on building and construction sites can be a major source of pollution to local waterways. Follow the practices discussed in this fact sheet and you will minimise erosion from your site, meet your legal requirements and help protect our waterways.

WHAT DO I NEED TO DO?

Before starting site works:

Stormwater pipe outfalls: should be located in areas where there is a low potential for soil erosion (e.g. areas of naturally occurring rock). If this is not possible, create a hard rock scour protector (**see Figure 11A**). If the pipe is highly visible (e.g. along a creek-side walking trail), natural rock and vegetation placement can conceal the outfall. If the outfall becomes council infrastructure, appropriate design approvals are required.

Check dams: are semi-pervious (typically loose rock) dam constructions that are placed in a series along open drainage channels to detain and reduce the velocity of stormwater runoff. They are particularly useful on gently sloping channels up to 10% (10:1) grade, but only effective for draining small areas of land (less than 4 hectares). If high flows are anticipated it may be necessary to line the entire base of the drainage channel with rocks.

Check dams can be temporarily used until a drainage channel has become revegetated. Alternatively, check dams can be a permanent feature if water detention is required. However, the drainage channel must still be able to effectively convey water.

Don't place check dams in channels that are already grass-lined, unless erosion is expected.

Don't construct check dams using sediment fences or straw bales.

Installing the control measures:

Stormwater pipe outfalls:

- 1) Fill material needs to be compacted to the density of the surrounding undisturbed material.
- 2) Place geotextile fabric over fill material.
- 3) Ensure that the rock work used for scour protection conforms to the required limits for water flow energy dissipation. (Ensure that the underlying geotextile does not sustain serious damage during the rock work phase.)
- 4) Repair any damage to geotextile areas with patches of geotextile (ensuring a 300 mm overlap with surrounding intact fabric).

Note: If low water flow has been determined for the stormwater pipe outfall, leave gaps in the rock work and plant into cuts in the geotextile.

Fact Sheet 11

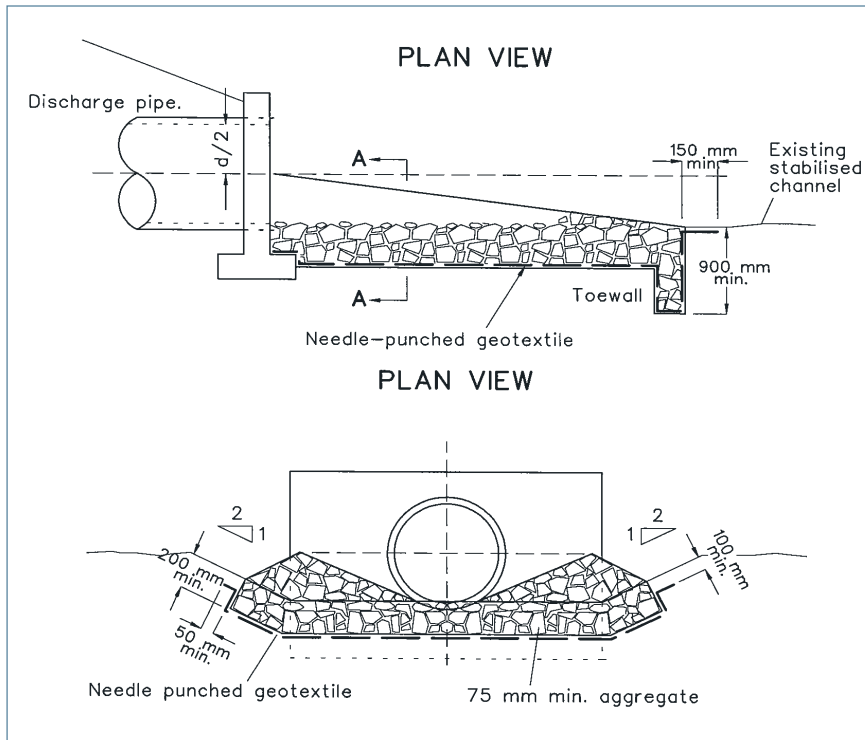


Figure 11A: Hard rock scour protector.

Check dams: these are appropriate for small channels with low flows that are susceptible to erosion (for larger channels or higher flows, specialist design may be required). A number of check dams will probably need to be built.

- 1) Excavate a shallow (200 mm) trench perpendicular to the drainage channel.
- 2) Construct the dam from aggregate (washed sand/gravel), placed in sandbags (for easy deconstruction). Place bags within the trench and build up the dam wall.
- 3) Ensure that the height of the dam spillway is less than 1 metre above the base of the drainage channel.
- 4) Ensure the dam height and spillway height does not dramatically impede water conveyance.
- 5) Space individual check dams so the toe of the upstream dam is level with the spillway of the next downstream dam. Otherwise extend downstream toe to provide erosion protection.
- 6) Check dams require regular maintenance as accumulated sediment needs to be removed, to prevent it becoming resuspended during subsequent storms.

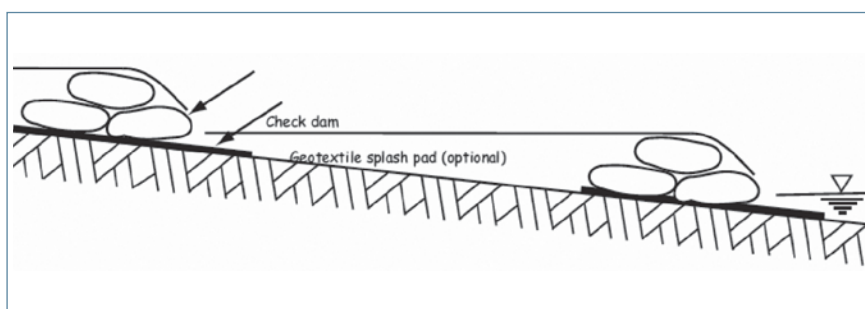


Figure 11B: Example of a check dam.

List of fact sheets

1. Soil & Water Management on Large Building & Construction Sites
2. Soil & Water Management on Standard Building & Construction Sites
3. Soil & Water Management Plans
4. Dispersive Soils – High Risk of Tunnel Erosion
5. Minimise Soil Disturbance
6. Preserve Vegetation
7. Divert Up-slope Water
8. Erosion Control Mats & Blankets
9. Protect Service Trenches & Stockpiles
10. Early Roof Drainage Connection

11. Scour Protection – Stormwater Pipe Outfalls & Check Dams

12. Stabilised Site Access
13. Wheel Wash
14. Sediment Fences & Fibre Rolls
15. Protection of Stormwater Pits
16. Manage Concrete, Brick & Tile Cutting
17. Sediment Basins
18. Dust Control
19. Site Revegetation

Remember:

Everyone working on building and construction sites has a responsibility to prevent pollution. If you do have an accident and pollution occurs you are required by law to notify the site supervisor. If the site supervisor cannot be contacted, workers should immediately notify the local council so they can work with you to minimise any harm to the environment.

Acknowledgement:

Figure 11A from Landcom 2004 "Soils and Construction Volume 1 Managing Urban Stormwater (4th edition)". Figure 11B from South East Queensland Healthy Waterways partnership 2006 "Best Practice Guidelines for the Control of Stormwater Pollution from Building Sites". Text in this brochure has been obtained and modified from the "Do It Right On Site" brochure series, kindly provided by the Southern Sydney Regional Organisation of Councils.

Date of Issue: December 2008