

# Protection of Stormwater Pits



## What is it?

Protect the stormwater system from blocking with sediment and building materials by placing control measures around or inside any stormwater pits on and below the site. Stormwater pit protection is an important last resort sediment control measure that should be used in conjunction with other on-site practices.

## Why is it important?

Sediment generated from erosion on building and construction sites can be a major source of pollution to local waterways. Follow the practices discussed in this fact sheet and you will control sediment run-off from your site, meet your legal requirements and help protect our waterways.

## Fact Sheet 15

## WHAT DO I NEED TO DO?

### **Before starting site works:**

Identify any stormwater pits and drains on and below the site. Plan the layout of the work site so that any wash-down areas and tile or brick cutting areas are not near them. Clearly mark all the stormwater pits and drains on the site plan and choose appropriate methods that will protect them. Install these sediment control measures before site work commences. Document them on your Soil and Water Management Plan (if required) (**see Fact Sheet 3**) and ensure staff are aware of its importance.

**Note:** the placement of sediment control measures on road reserves (i.e. off the work site) will normally require approval from the owner of the road, i.e. council or the Department of Infrastructure, Energy and Resources (DIER).

### **Installing the control measures:**

There are a range of sediment control measures to protect stormwater pits including, sediment fence traps, filter socks and stormwater pit traps. Those that collect sediment above the stormwater pit are easier to clean but have low storage capacity compared to controls that are installed inside the stormwater pits. Place cones around controls in the gutters or on roads to prevent vehicles damaging them.

**Sediment fence trap:** these are sediment fences staked around the stormwater pit to trap sediment. Fabric must be partially buried so that water and sediment does not just flow underneath. The more space between the fence and the pit, the more chance of sediment settling and the greater the capacity of the trap (**see Figure 15A**).

**Filter socks:** are woven tubes filled with compost or bioremediation media that separate sediment, hydrocarbons, nutrients and heavy metals from site runoff. Filter socks are more effective than sandbags or geotextile sausages filled with gravel. Filter socks are able to treat runoff at higher flow rates with significantly less ponding.

Filter socks can be installed in the kerb and gutter below the work site, while longer socks can be used as a barrier around the stormwater pit (**see Figure 15B**).

**Stormwater pit traps:** are baskets, trays, bags or screens placed just below the entrance of the stormwater pit. They prevent sediment from entering the stormwater system. Fine mesh or fabric filters should be used to capture sediment (**see Figure 15C**).

### **Maintaining the control measures:**

All sediment control measures should be inspected, especially after rainfall events and cleaned regularly to maintain effectiveness and prevent bypass. The built up material can be re-stockpiled and used on-site (if it is not contaminated), or otherwise disposed to landfill.

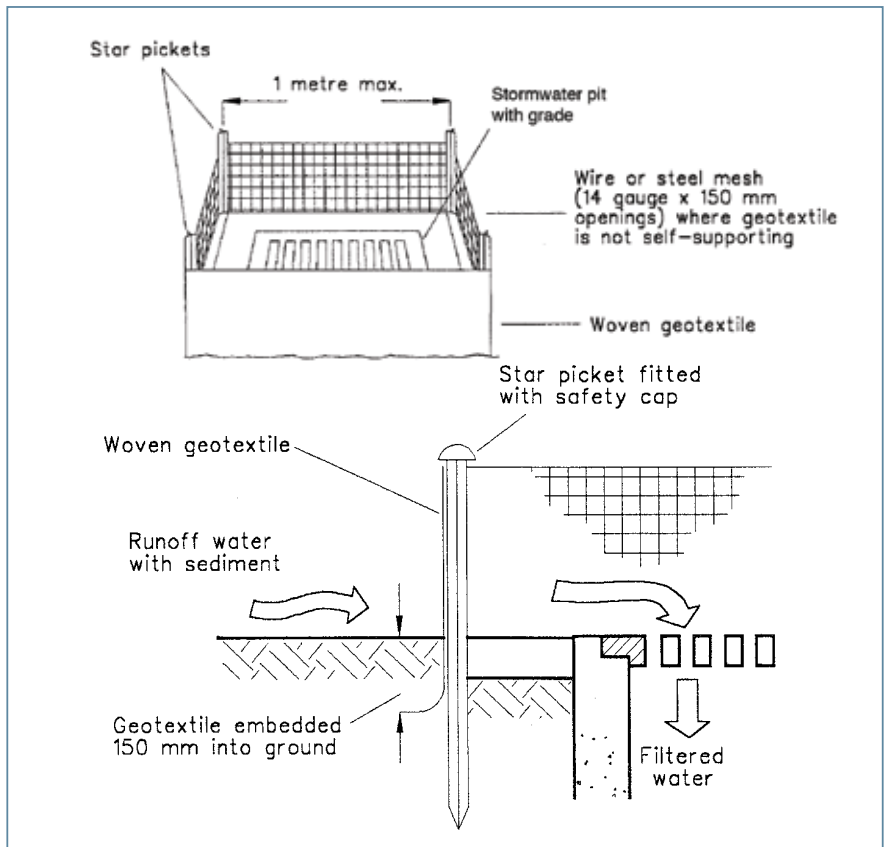


Figure 15A: A sediment fence trap.

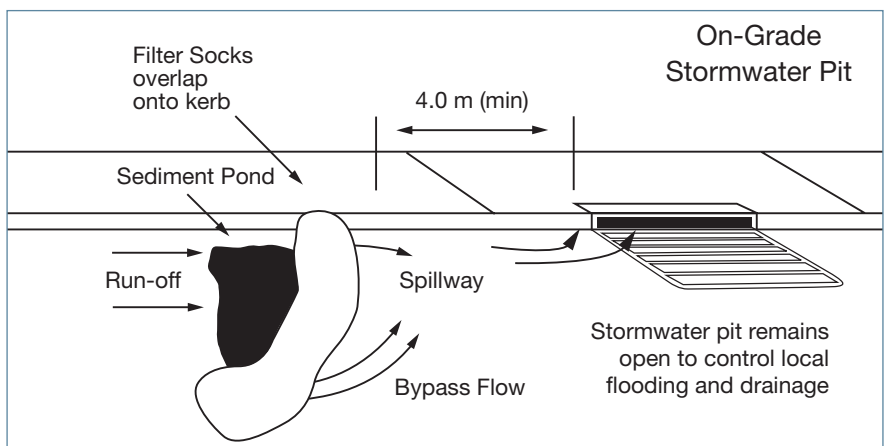


Figure 15B: A filter sock.

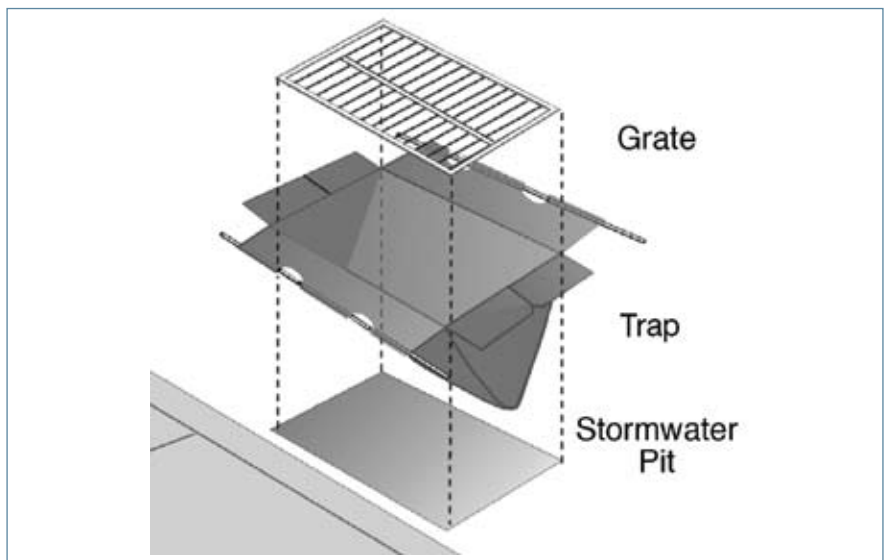


Figure 15C: Stormwater pit trap.

## List of fact sheets

1. Soil & Water Management on Large Building & Construction Sites
2. Soil & Water Management on Standard Building & Construction Sites
3. Soil & Water Management Plans
4. Dispersive Soils – High Risk of Tunnel Erosion
5. Minimise Soil Disturbance
6. Preserve Vegetation
7. Divert Up-slope Water
8. Erosion Control Mats & Blankets
9. Protect Service Trenches & Stockpiles
10. Early Roof Drainage Connection
11. Scour Protection – Stormwater Pipe Outfalls & Check Dams
12. Stabilised Site Access
13. Wheel Wash
14. Sediment Fences & Fibre Rolls

## 15. Protection of Stormwater Pits

16. Manage Concrete, Brick & Tile Cutting
17. Sediment Basins
18. Dust Control
19. Site Revegetation

### Remember:

Everyone working on building and construction sites has a responsibility to prevent pollution. If you do have an accident and pollution occurs you are required by law to notify the site supervisor. If the site supervisor cannot be contacted, workers should immediately notify the local council so they can work with you to minimise any harm to the environment.

### Acknowledgement:

Figure 15A from Landcom 2004 "Soils & Construction Volume I Managing Urban Stormwater (4th edition)". Figure 15B after South East Queensland Healthy Waterways Partnership 2006 "Best Practice Guidelines for the Control of Stormwater Pollution from Building Sites". Figure 15C after California Regional Water Quality Board 1999 "Erosion & Sediment Control Field Manual". Text in this brochure has been obtained and modified from the "Do It Right On Site" brochure series, kindly provided by the Southern Sydney Regional Organisation of Councils.

Date of Issue: December 2008